


ACON U-04
USB TO RS 485-2 W/4W CONVERTER
NON-ISOLATED

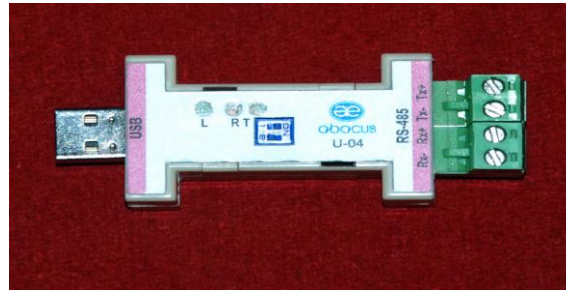

INTRODUCTION: The model is USB bus power, high speed, USB to RS485- (2 wire /4 wire) Converter. It supports AUTO baud rate. The model supports for RS485- 2 wire, 4 wires.


SPECIFICATIONS:

INTERFACE : USB TO RS485- 2 Wire,4 wire.
OPERATION : 1) MULTI-DROP HALF DUPLEX (RS485- 2 W)
 MULTI-DROP FULL DUPLEX (RS485- 4 W)
SPEED : 2400 TO 115KBPS
CONNECTORS : 1) USB- USB 'A' TYPE FEMALE CONNECTOR
 2) RS 485- 2 Wire – TERMINAL BLOCK (DETACHABLE).
 RS 485- 4 Wire – TERMINAL BLOCK (DETACHABLE).
INDICATIONS : POWER, TX, RX
POWER : USB BUS POWER
CASE : PLASTIC ENCLOSER.
SIZE : 80 mm x 33 mm x 15 mm
OPERATING TEMP : 0 - 70°C
POWER CONSUMPTION : 1W
HUMIDITY : 5 – 95% NON CONDENSING
ACCESSORIES : DRIVER CD

DIP SWITCH SETTING FOR RS-485 2W/4W:


ON	OFF	
1	2	2W
2	1	4W

RS485-2W



CONNECTION DETAILS:

RS-485 4W



Address: Narhe Industrial Estate, Lane No. 1, Sr. No. 44/21, Narhe Gaon, Tal-Haveli, Pune, Maharashtra 411041 **Tel :** +91 9284025858

Email: Info@abacuselectronics.in **Webiste:** www.abacuselectronics.in